

# NPN SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR

ISSUE 2 – JULY 1995


**ZTX618**

## FEATURES

- \* 10A Peak pulse current
- \* Excellent  $h_{FE}$  characteristics up to 10A (pulsed)
- \* Extremely low saturation voltage e.g. 7mV typ.
- \*  $I_C$  cont 3.5A

## APPLICATIONS

- \* Power MOSFET gate driver in conjunction with complementary ZTX718

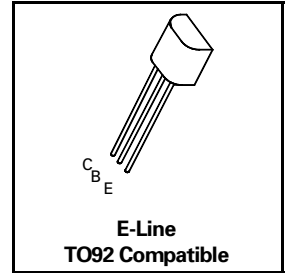

## ABSOLUTE MAXIMUM RATINGS.

| PARAMETER                               | SYMBOL         | VALUE       | UNIT |
|---|----------------|-------------|------|
| Collector-Base Voltage                  | $V_{CBO}$      | 20          | V    |
| Collector-Emitter Voltage               | $V_{CEO}$      | 20          | V    |
| Emitter-Base Voltage                    | $V_{EBO}$      | 5           | V    |
| Peak Pulse Current                      | $I_{CM}$       | 10          | A    |
| Continuous Collector Current            | $I_C$          | 3.5         | A    |
| Base Current                            | $I_B$          | 500         | mA   |
| Practical Power Dissipation*            | $P_{totp}$     | 1.5         | W    |
| Power Dissipation                       | $P_{tot}$      | 1           | W    |
| Operating and Storage Temperature Range | $T_j; T_{stg}$ | -55 to +200 | °C   |

- \* Device mounted on P.C.B. with copper equal to 1 sq. Inch minimum.

# ZTX618







## ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

| PARAMETER                             | SYMBOL        | MIN.                    | TYP.                    | MAX.             | UNIT           | CONDITIONS.  |
|---------------------------------------|---------------|-------------------------|-------------------------|------------------|----------------|--|
| Collector-Base Breakdown Voltage      | $V_{(BR)CBO}$ | 20                      | 100                     |                  | V              | $I_C=100\mu\text{A}$   |
| Collector-Emitter Breakdown Voltage   | $V_{(BR)CEO}$ | 20                      | 27                      |                  | V              | $I_C=10\text{mA}^*$  |
| Emitter-Base Breakdown Voltage        | $V_{(BR)EBO}$ | 5                       | 8.3                     |                  | V              | $I_E=100\mu\text{A}$   |
| Collector Cut-Off Current             | $I_{CBO}$     |                         |                         | 100              | nA             | $V_{CB}=16\text{V}$  |
| Emitter Cut-Off Current               | $I_{EBO}$     |                         |                         | 100              | nA             | $V_{EB}=4\text{V}$   |
| Collector Emitter Cut-Off Current     | $I_{CES}$     |                         |                         | 100              | nA             | $V_{CES}=16\text{V}$   |
| Collector-Emitter Saturation Voltage  | $V_{CE(sat)}$ |                         | 7<br>80<br>210          | 15<br>150<br>255 | mV<br>mV<br>mV | $I_C=0.1\text{A}, I_B=10\text{mA}^*$<br>$I_C=1\text{A}, I_B=10\text{mA}^*$<br>$I_C=3.5\text{A}, I_B=50\text{mA}^*$   |
| Base-Emitter Saturation Voltage       | $V_{BE(sat)}$ |                         | 0.93                    | 1.05             | V              | $I_C=3.5\text{A}, I_B=50\text{mA}^*$   |
| Base-Emitter Turn-On Voltage          | $V_{BE(on)}$  |                         | 0.86                    | 1.0              | V              | $I_C=3.5\text{A}, V_{CE}=2\text{V}^*$  |
| Static Forward Current Transfer Ratio | $h_{FE}$      | 200<br>300<br>170<br>40 | 400<br>450<br>300<br>85 |                  |                | $I_C=10\text{mA}, V_{CE}=2\text{V}^*$<br>$I_C=200\text{mA}, V_{CE}=2\text{V}^*$<br>$I_C=3\text{A}, V_{CE}=2\text{V}^*$<br>$I_C=10\text{A}, V_{CE}=2\text{V}^*$ |
| Transition Frequency                  | $f_T$         | 100                     | 140                     |                  | MHz            | $I_C=50\text{mA}, V_{CE}=10\text{V}$<br>$f=100\text{MHz}$  |
| Output Capacitance                    | $C_{obo}$     |                         | 23                      | 30               | pF             | $V_{CB}=10\text{V}, f=1\text{MHz}$   |
| Turn-On Time                          | $t_{(on)}$    |                         | 170                     |                  | ns             | $V_{CC}=10\text{V}, I_C=1\text{A}$<br>$I_{B1}=-I_{B2}=10\text{mA}$   |
| Turn-Off Time                         | $t_{(off)}$   |                         | 400                     |                  | ns             |  |

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$

# ZTX618

## TYPICAL CHARACTERISTICS

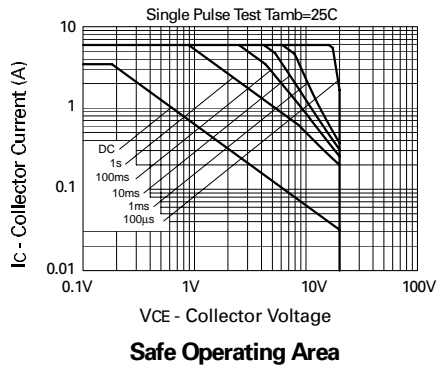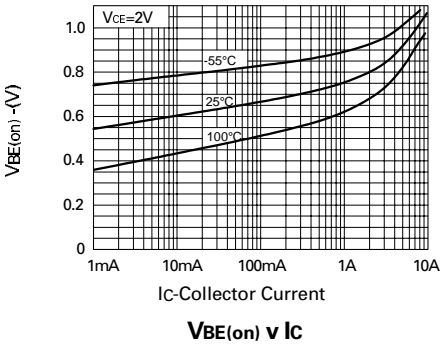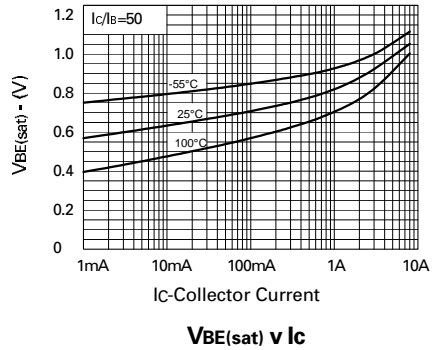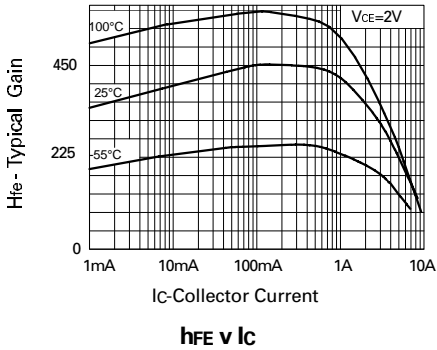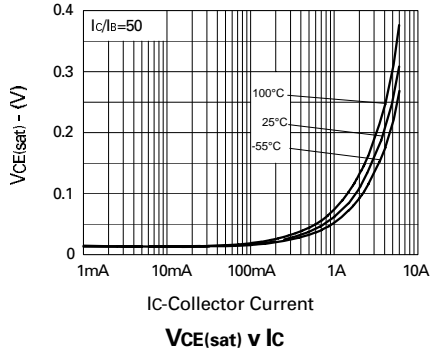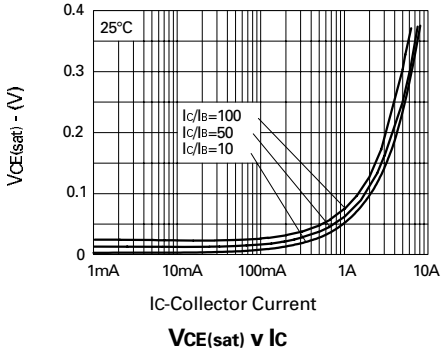


# ZTX618

## THERMAL CHARACTERISTICS

| PARAMETER   | SYMBOL             | MAX. | UNIT |
|---|--------------------|------|------|
| Thermal Resistance:<br>Junction to Ambient <sub>1</sub> | $R_{th(j-amb)1}$   | 175  | °C/W |
| Junction to Ambient <sub>2</sub>                        | $R_{th(j-amb)2}$ † | 116  | °C/W |

† Device mounted on P.C.B. with copper equal to 1 sq. Inch minimum.

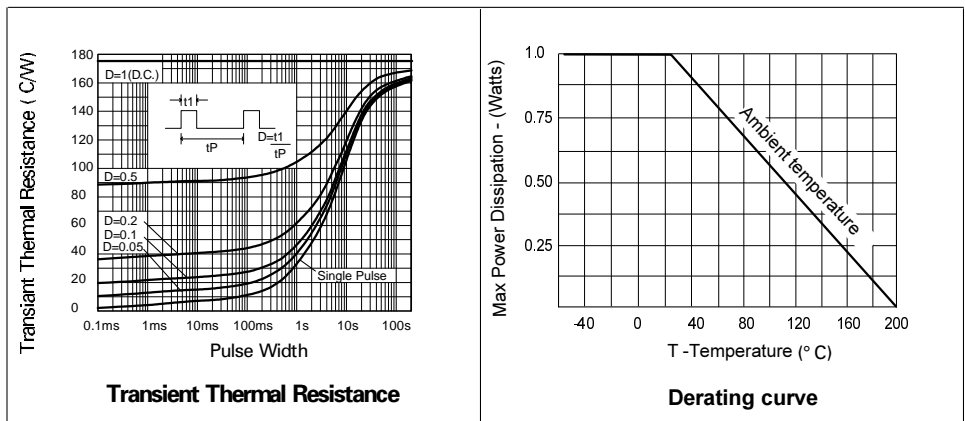

**ZETEX** Zetex plc.  
Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.  
Telephone: (44)161 622 4422 (Sales), (44)161 622 4444 (General Enquiries)  
Fax: (44)161 622 4420

Zetex GmbH  
Streitfeldstraße 19  
D-81673 München  
Germany  
Telefon: (49) 89 45 49 49 0  
Fax: (49) 89 45 49 49 49

Zetex Inc.  
47 Mall Drive, Unit 4  
Commack NY 11725  
USA  
Telephone: (516) 543-7100  
Fax: (516) 864-7630

Zetex (Asia) Ltd.  
3510 Metroplaza, Tower 2  
Hing Fong Road,  
Kwai Fong, Hong Kong  
Telephone: (852) 26100 611  
Fax: (852) 24250 494

These are supported by  
agents and distributors in  
major countries world-wide  
©Zetex plc 1997  
**Internet:**  
<http://www.zetex.com>

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[ZTX618STZ](#) [ZTX618](#)