
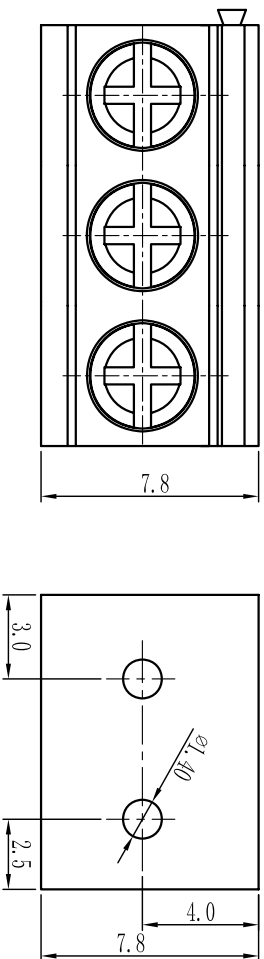


慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

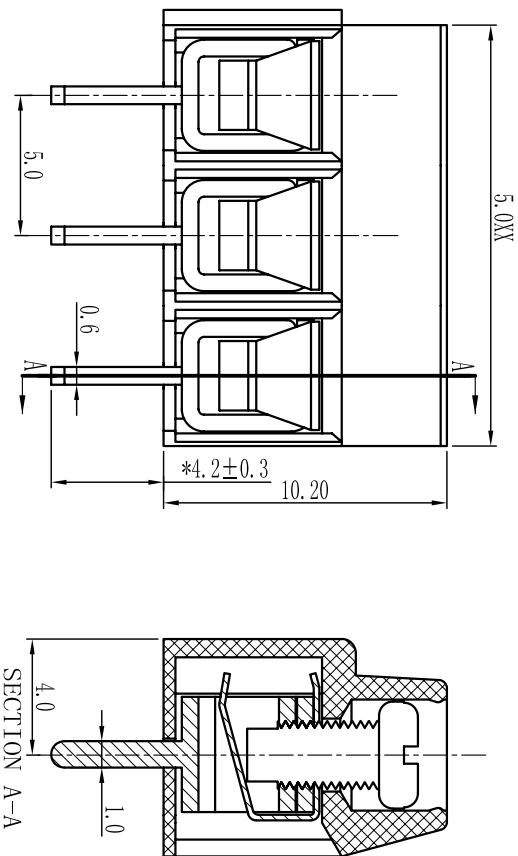

订购方式：
HOW TO ORDER

型号/Model	-	板数/POLE	-	P	-	客户需求 Customer request	
<small>0 未定义/No definition</small> <small>1 标准间距/Standard pitch</small> <small>2 2X间距/Double pitch</small>		<small>1 灰色/Gray</small> 10 <small>2 蓝色/Blue</small> 20 <small>3 黑色/Black</small> 30		<small>4 绿色/Green</small> 40 <small>5 橙色/Orange</small> 50 <small>6 红色/Red</small> 60		<small>7 透明/Transparent</small> 70 <small>8 黄色/Yellow</small> 80 <small>9 白色/White</small> 90	

TOLERANCES EXCEPT AS NOTED

Linear dimension	fillet	chamfer	short angle	sid	—	—	—	—
over 6 to 30	over 30 to 120	over 480 to 480	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30
over 30 to 120	over 480 to 480	all to 6	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120	over 120 to 120
±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°
30'	20'	10'	0.5	0.025	0.06	0.12	0.4	

电气性能/Electrical
 参考标准/Standard: UL IEC
 额定电压/Rated voltage: 300V 250V
 额定电流/Rated current: 8A 15A
 接触电阻/Contact resistance: 20m Ω
 使用线径/Wire range: 26-14AWG 1.5mm²
 耐电压/Withstanding voltage: AC2000V/1min
 绝缘电阻/Insulation resistance: 500M Ω /DC300V

机械性能/Mechanical

温度范围/Temp Range: -40° C⁺+105° C
 扭矩/Torque: 0.4Nm(3.5lb`in)
 剥线长度/Strip length: 6-7mm

尺寸/Dimensions

间距/Pitch: 5.0mm

板数/Poles: 2P-24P

材质及电镀/Material

塑件/Housing: PA66, U94V-0

螺丝/Screws: M2.5, steel Zinc plated

方针/Pin header: Brass, Ni plated

弹片/Snaprel: Phosphor bronze, Ni plated

第一视角/FIRST ANGLE PROJECTION



单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	比例
----------	----	---------	----	----------	----

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ126-KXP-11Y-00A