
April 2008



# **BAS20 General Purpose High Voltage Diode**







**Connection Diagram** 

## Absolute Maximum Ratings \* T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V <sub>RRM</sub>	Maximum Repetitive Reverse Voltage	200	V
I <sub>F(AV)</sub>	Average Rectified Forward Current	200	mA
I <sub>FSM</sub>	Non-repetitive Peak Forward Surge Current Pulse Width = 1.0 second Pulse Width = 1.0 microsecond	1.0 2.0	A A
T <sub>STG</sub>	Storage Temperature Range	-55 to +150	°C
TJ	Operating Junction Temperature	-55 to +150	°C

\* These ratings are limiting values above which the serviceability of the diode may be impaired.

NOTES:


1) These ratings are based on a maximum junction temperature of 150 degrees C.
2) These are steady limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

## **Thermal Characteristics**

Symbol	Parameter	Value	Units
PD	Power Dissipation	350	mW
R <sub>θJA</sub> Thermal Resistance, Junction to Ambient         357		357	°C/W

## Electrical Characteristics T<sub>A</sub>=25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Max.	Units
V <sub>R</sub>	Breakdown Voltage	I <sub>R</sub> = 100μΑ	200		V
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> = 100mA I <sub>F</sub> = 200mA		1.0 1.25	V V
I <sub>R</sub>	Reverse Leakage	V <sub>R</sub> =50V V <sub>R</sub> =50V, T <sub>A</sub> = 150°C		100 100	nA μA
C <sub>T</sub>	Total Capacitance	V <sub>R</sub> = 0V, f = 1.0MHz		5	pF
t <sub>rr</sub>	Reverse Recovery Time	I <sub>F</sub> = I <sub>R</sub> =30mA, I <sub>RR</sub> = 3.0mA, R <sub>L</sub> = 100Ω		50	ns

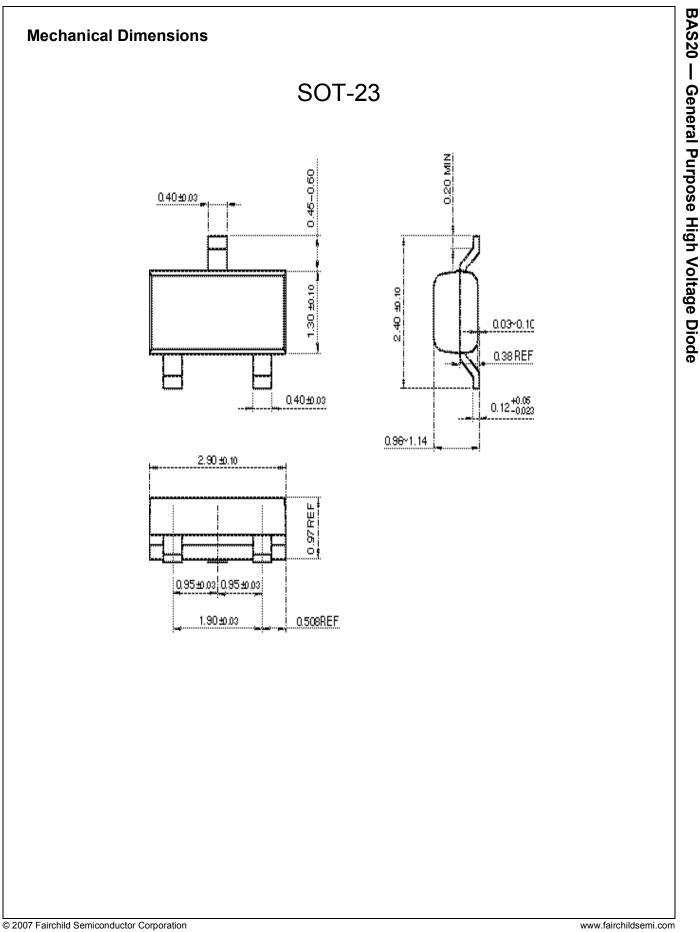

2

BAS20 Rev. 1.0.0



#### SEMICONDUCTOR

### TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx <sup>®</sup> Build it Now <sup>™</sup> CorePLUS <sup>™</sup> <i>CROSSVOLT</i> <sup>™</sup> CTL <sup>™</sup> Current Transfer Logic <sup>™</sup> EcoSPARK <sup>®</sup> Fairchild <sup>®</sup> Fairchild <sup>®</sup> Fairchild Semiconductor <sup>®</sup> FACT Quiet Series <sup>™</sup> FACT <sup>®</sup> FAST <sup>®</sup> FastvCore <sup>™</sup> FPS <sup>™</sup> FRFET <sup>®</sup> Global Power Resource <sup>SM</sup>	Green FPS™ Green FPS™ e-Series™ GTO™ <i>i-Lo</i> ™ IntelliMAX™ ISOPLANAR™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroFET™ MicroPak™ MillerDrive™ Motion-SPM™ OPTOLOGIC® OPTOPLANAR® © PDP-SPM™ Power220®	Power247 <sup>®</sup> POWEREDGE <sup>®</sup> Power-SPM™ PowerTrench <sup>®</sup> Programmable Active Droop™ QFET <sup>®</sup> QS™ QT Optoelectronics™ Quiet Series™ RapidConfigure™ SMART START™ SPM <sup>®</sup> STEALTH™ SuperFET™ SuperSOT™-3 SuperSOT™-6	SuperSOT <sup>™</sup> -8 SyncFET <sup>™</sup> The Power Franchise <sup>®</sup> <b>P</b> franchise TinyBoost <sup>™</sup> TinyBoost <sup>™</sup> TinyBoost <sup>™</sup> TinyDogic <sup>®</sup> TINYOPTO <sup>™</sup> TinyPower <sup>™</sup> TinyPower <sup>™</sup> TinyPWM <sup>™</sup> TinyWire <sup>™</sup> µSerDes <sup>™</sup> UHC <sup>®</sup> UniFET <sup>™</sup> VCX <sup>™</sup>
---	---	---	--

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

#### As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be pub- lished at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontin- ued by Fairchild semiconductor. The datasheet is printed for reference infor- mation only.

#### PRODUCT STATUS DEFINITIONS Definition of Terms



# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: