# NSS20201MR6T1G

# 20 V, 3 A, Low V<sub>CE(sat)</sub> **NPN Transistor**

ON Semiconductor's e<sup>2</sup>PowerEdge family of low V<sub>CE(sat)</sub> transistors are miniature surface mount devices featuring ultra low saturation voltage (V<sub>CE(sat)</sub>) and high current gain capability. These are designed for use in low voltage, high speed switching applications where affordable efficient energy control is important.

Typical application are DC–DC converters and power management in portable and battery powered products such as cellular and cordless phones, PDAs, computers, printers, digital cameras and MP3 players. Other applications are low voltage motor controls in mass storage products such as disc drives and tape drives. In the automotive industry they can be used in air bag deployment and in the instrument cluster. The high current gain allows e<sup>2</sup>PowerEdge devices to be driven directly from PMU's control outputs, and the Linear Gain (Beta) makes them ideal components in analog amplifiers.

## **MAXIMUM RATINGS** ( $T_A = 25^{\circ}C$ )

Rating	Symbol	Max	Unit	
Collector-Emitter Voltage	V <sub>CEO</sub>	20	V	
Collector-Base Voltage	V <sub>CBO</sub>	40	V	
Emitter-Base Voltage	V <sub>EBO</sub>	5.0	V	
Collector Current – Continuous	Ι <sub>C</sub>	2.0	A	
Collector Current – Peak	I <sub>CM</sub>	3.0	А	

## THERMAL CHARACTERISTICS

Characteristic Symbol		Мах	Unit	
Total Device Dissipation $T_A = 25^{\circ}C$	P <sub>D</sub> (Note 1)	460	mW	
Derate above 25°C		3.7	mW/°C	
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$ (Note 1)	272	°C/W	
Total Device Dissipation $T_A = 25^{\circ}C$	P <sub>D</sub> (Note 2)	780	mW	
Derate above 25°C		6.3	mW/°C	
Thermal Resistance, Junction-to-Ambient			°C/W	
Thermal Resistance, Junction-to-Lead #1	$R_{\theta JL}$ (Note 1)	48 40	°C/W °C/W	
Junction-to-Lead #1	R <sub>0JL</sub> (Note 2)	40	-C/W	
Total Device Dissipation (Single Pulse < 10 s)	P <sub>Dsingle</sub> (Note 2)	1.5	W	
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	–55 to +150	°C	

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.


FR-4 @ 100 mm2, 2 oz copper traces.
FR-4 @ 500 mm2, 2 oz copper traces.



## **ON Semiconductor®**

http://onsemi.com

# 20 VOLTS **3.0 AMPS** $\begin{array}{l} \text{NPN LOW V}_{\text{CE(sat)}} \text{ TRANSISTOR} \\ \text{EQUIVALENT R}_{\text{DS(on)}} \text{ 100 m} \Omega \end{array}$

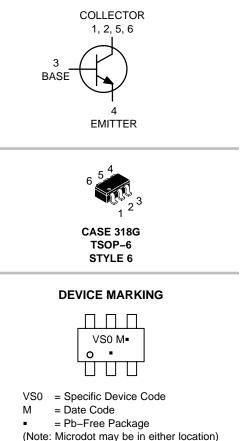

## ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NSS20201MR6T1G	TSOP-6 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## NSS20201MR6T1G


## **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS		-		-	
Collector – Emitter Breakdown Voltage $(I_C = 10 \text{ mA}, I_B = 0)$	V <sub>(BR)CEO</sub>	20	-	_	V
Collector-Base Breakdown Voltage $(I_C = 0.1 \text{ mA}, I_E = 0)$	V <sub>(BR)CBO</sub>	40	_	-	V
Emitter – Base Breakdown Voltage $(I_E = 0.1 \text{ mA}, I_C = 0)$	V <sub>(BR)EBO</sub>	5.0	_	_	V
Collector Cutoff Current ( $V_{CB} = 40 \text{ V}, I_E = 0$ )	I <sub>CBO</sub>	-	_	0.1	μΑ
Collector–Emitter Cutoff Current (V <sub>CES</sub> = 20 V)	ICES	_	_	0.1	μΑ
Emitter Cutoff Current (V <sub>EB</sub> = 5.0 V)	I <sub>EBO</sub>	_		0.1	μΑ
ON CHARACTERISTICS		-		-	
DC Current Gain (Note 3) ( $I_C = 1.0 \text{ mA}, V_{CE} = 5.0 \text{ V}$ ) ( $I_C = 0.5 \text{ A}, V_{CE} = 5.0 \text{ V}$ ) ( $I_C = 1.0 \text{ A}, V_{CE} = 5.0 \text{ V}$ )	h <sub>FE</sub>	300 300 200	- - -	- - -	
	V <sub>CE(sat)</sub>	- - -		0.150 0.100 0.025	V
Base – Emitter Saturation Voltage (Note 3) $(I_C = 1.0 \text{ A}, I_B = 0.1 \text{ A})$	V <sub>BE(sat)</sub>	-	-	0.95	V
Base – Emitter Turn–on Voltage (Note 3) $(I_C = 1.0 \text{ A}, V_{CE} = 2.0 \text{ V})$	V <sub>BE(on)</sub>	-	-	0.90	V
Cutoff Frequency ( $I_C = 100 \text{ mA}, V_{CE} = 5.0 \text{ V}, f = 100 \text{ MHz}$	f <sub>T</sub>	200	-	_	MHz
Output Capacitance (f = 1.0 MHz)	C <sub>obo</sub>	_	_	15	pF

3. Pulsed Condition: Pulse Width  $\leq$  300 µsec, Duty Cycle  $\leq$  2%.

## PACKAGE DIMENSIONS

TSOP-6 CASE 318G-02 **ISSUE N** 

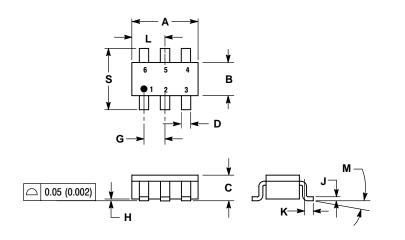


- NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETER. 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL. 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS		MILLIMETERS		INC	HES
DIM	MIN	MAX	MIN	MAX		
Α	2.90	3.10	0.1142	0.1220		
В	1.30	1.70	0.0512	0.0669		
С	0.90	1.10	0.0354	0.0433		
D	0.25	0.50	0.0098	0.0197		
G	0.85	1.05	0.0335	0.0413		
н	0.013	0.100	0.0005	0.0040		
J	0.10	0.26	0.0040	0.0102		
Κ	0.20	0.60	0.0079	0.0236		
Ĺ	1.25	1.55	0.0493	0.0610		
М	0	10	0	10		
S	2.50	3.00	0.0985	0.1181		

STYLE 6: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. EMITTER 5. COLLECTOR 6. COLLECTOR

## **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NSS20201MR6T1G

**ON Semiconductor** and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other application in which the Failure of the SCILLC product create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 61312, Phoenix, Arizona 85082–1312 USA Phone: 480–829–7710 or 800–344–3860 Toll Free USA/Canada Fax: 480–829–7709 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center 2–9–1 Kamimeguro, Meguro–ku, Tokyo, Japan 153–0051 Phone: 81–3–5773–3850 ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor: NSS20201MR6T1G